


Varia

The plug system for quick, robust connection with standardised components.

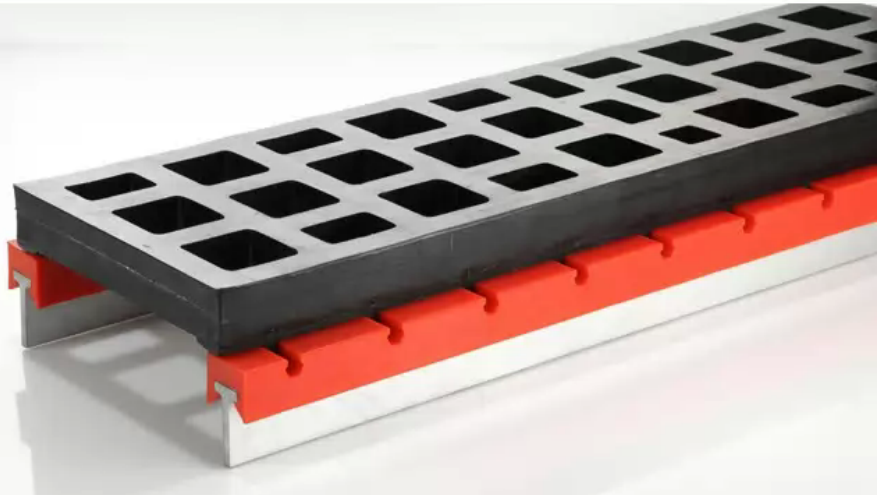

Versatile and easy to mount


The VARIA plug system features strong yet easy-to-install standardised components. The clamp-on screen panels are made of KÜPRENE, GK-SOFT, GIGANT or CLEAN, depending on their area of application. The standardised construction makes it possible to use a variety of surface materials on one screen deck, which frequently offers practical advantages. Adapter bars attach the clamp-on screen panel to the supporting structure. The screens are easy to insert, lever out or slide in and out from the sides.

The adapter bar also protects the steel supporting structure from wear. The VARIA plug system is not only suitable for installation on new screening machines, but is also ideal for refitting existing systems. No additional parts are required for installation and removal. VARIA requires practically no maintenance and is extremely cost-effective.

Functions

- Very easy to install
- Durable steel supporting structure
- Adapter bars protect the supporting structure from wear
- Highly wear resistant panels of rubber or polyurethane with tapered openings
- A variety of surface materials on one screen deck possible
- Suitable for new or refitted ploughs
- Very efficient

Technology

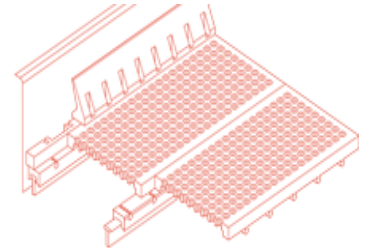

The supporting structure is made up of steel T-sections and a polyurethane adapter bar. The screen panels can then be simply inserted or replaced.

Materials

Gigant

Moulded vulcanised rubber with a hardness of approx. 60 Shore A. Very abrasion resistant and elastic.

GK Soft

Polyurethane in various hardnesses up to 85 Shore A. Wear resistant and elastic.

Clean

Moulded vulcanised rubber with a hardness of approx. 35 Shore A. Highly flexible and abrasion resistant.

Küprene

Wear-resistant polyurethane with a hardness of 90 Shore A. Elastic and impact resistant. Resistant to water and many chemicals.